

The Power of Three

Heavy Duty Photovoltaic Disconnect Switches



With its truly innovating design, a single Siemens Safety Switch can perform the work of 3 switches by disconnecting up to 3 separate 600V DC circuits with the help of 3 powerful magnets. Great results, more savings.

These switches are designed for 600VDC max. photovoltaic systems which must comply with Article 690 of the NEC. Switches are available for use in both negative and positive ground PV systems.



Features

- Available in 30-200A ratings in both fusible and non-fusible versions
- Type 1 and 3R enclosures for either indoor or outdoor applications
- All switches comply with UL98 requirements and are UL listed in file number E335018 as UL1741 Photovoltaic Disconnect Switches
- Tested per UL requirements to control three separate 600VDC circuits in a single 3 pole switch
- Factory installed ground bar supplied as standard
- Door labeling required by Article 690 of the NEC is supplied as standard
- Unique enclosure design features a rolled out front flange that prevents cuts and scrapes to conductor insulation and to the installer's hands
- Metal handle with large plastic grip features a positive stop in both the ON and OFF positions
- Two and 3 point mounting provisions are standard
- Large top, bottom and side gutters facilitate wiring
- Line and load lugs accept larger conductors than required by UL to allow larger cables to be used when required to minimize voltage drop

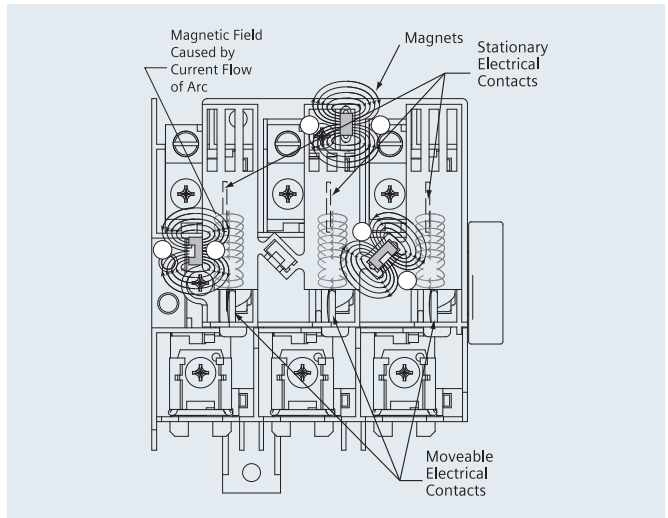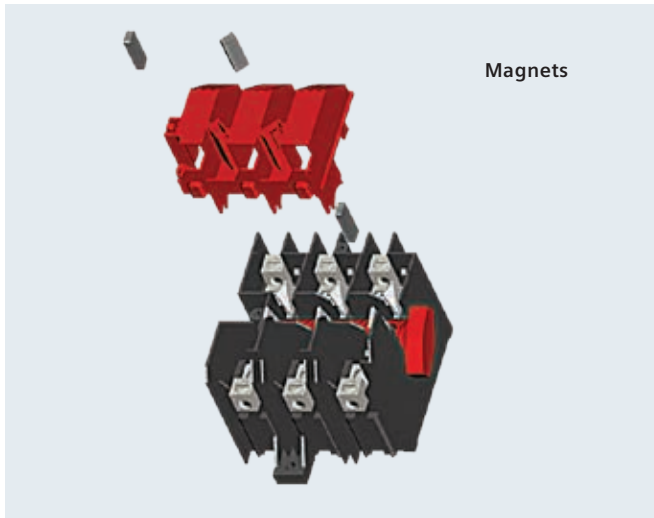

A true design innovation!

A very hot arc is generated by the interruption of a 600VDC circuit when under load. This damages conventional safety switch contacts and insulating material after a small number of operations unless the poles are connected in series to spread this destructive energy over at least two sets of contacts.

As illustrated above, powerful magnets have been incorporated into the line base assembly of our disconnects which are strategically located and specifically aligned to disperse this energy and to very quickly extinguish the arc. The result is a line of disconnects that performs at a level far beyond that of any conventional safety switch.

These switches have passed the extremely rigorous testing required for photovoltaic disconnects **with three separate 600VDC circuits connected to a single 3 pole switch.**


The test requirements for PV switches are the same as those for conventional safety switches except that the overload testing must be conducted at 200% of the switch rating instead of 150%.

Note: Disconnects are subject to applicable de-rating factors defined by Article 690 of the NEC.

Ordering information

Ampere Rating	Indoor - Type 1		Outdoor - Type 3R		Rated Isc Per NEC Article 690
	Catalog Number	Ship wt.(lbs.)	Catalog Number	Ship wt. (lbs.)	
Negative Ground 3 Pole 3 Wire Fusible 600V DC					
30	HF361PV	14	HF361RPV	15	19.2 A
60	HF362PV	20	HF362RPV	21	38.4 A
100	HF363PV	25	HF363RPV	26	64.0 A
200	HF364PV	49	HF364RPV	50	128.0 A
Negative Ground 3 Pole 3 Wire Non-Fusible 600V DC					
30	HNF361PV	12	HNF361RPV	13	24.0 A
60	HNF362PV	19	HNF362RPV	20	48.0 A
100	HNF363PV	24	HNF363RPV	25	80.0 A
200	HNF364PV	47	HNF364RPV	48	160.0 A
Positive Ground 3 Pole 3 Wire Fusible 600V DC					
30	HF361PVPG	14	HF361RPVPG	15	19.2 A
60	HF362PVPG	20	HF362RPVPG	21	38.4 A
100	HF363PVPG	25	HF363RPVPG	26	64.0 A
200	HF364PVPG	49	HF364RPVPG	50	128.0 A
Positive Ground 3 Pole 3 Wire Non-Fusible 600V DC					
30	HNF361PVPG	12	HNF361RPVPG	13	24.0 A
60	HNF362PVPG	19	HNF362RPVPG	29	48.0 A
100	HNF363PVPG	24	HNF363RPVPG	25	80.0 A
200	HNF364PVPG	47	HNF364RPVPG	48	160.0 A

Note: All disconnects are rated at 10,000 AIC per UL requirements when used with or protected by Class K, J, or R fuses rated at 600VDC.


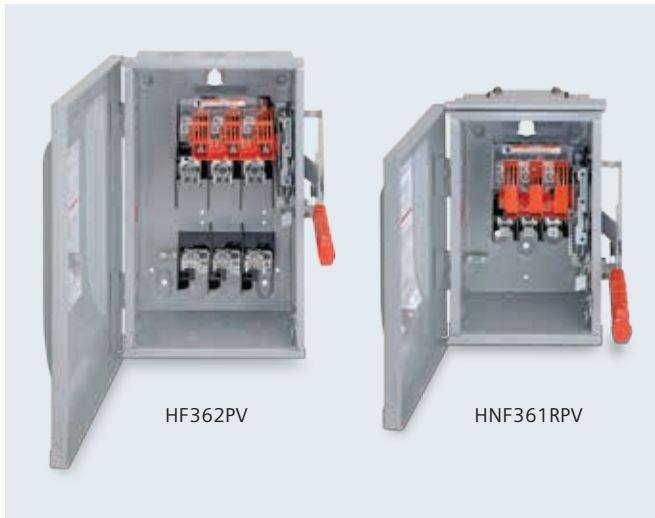


Accessories


	Catalog Number	Description
Class R Fuse Clip Kits		
HR612	HR612	30A, 600V 3 pole kit
	HR62	60A, 600V 3 pole kit
	HR63	100A, 600V 3 pole kit
	HR64	200A, 600V 3 pole kit
Neutral / Negative Terminal Kits		
HN612	HN612	30A neutral kit
	HN623	60 and 100A neutral kit
	HN64	200A neutral kit
Auxiliary Contact Kits		
HA161234	HA161234	1 NO, 1NC (10A at 250V AC max.)
	HA261234	2 NO, 2NC (10A at 250V AC max.)
Type 3R Hubs		
ECHS200	ECHS075	¾" (conduit size)
	ECHS100	1" (conduit size)
	ECHS125	1¼" (conduit size)
	ECHS150	1½" (conduit size)
	ECHS200	2" (conduit size)
	ECHS250	2½" (conduit size)

Dimension Drawing

TOP ENDWALL (outdoor only)

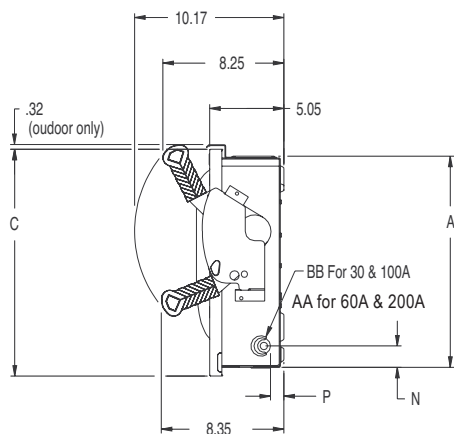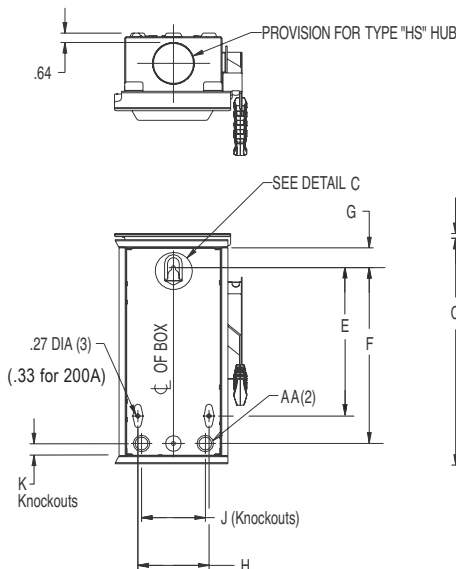

BOTTOM ENDWALL (Also typical for top endwall for indoor switches)

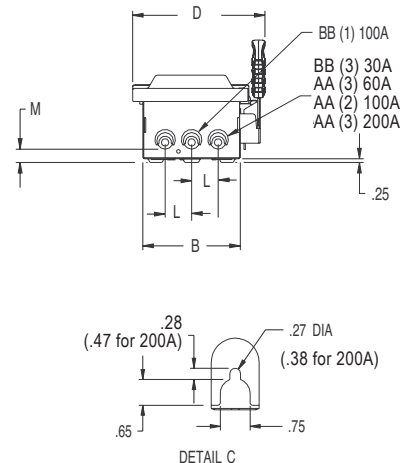

Catalog Number	Ampere Rating	Dimensions – Inches													
		Enclosure				Mounting				Knockout Locations ^①					
		A	B	C	D	E	F	G	H	J	K	L	M	N	P
HF361PV, PG	30	14.26	6.64	15.45	9.01	10.11	12.00	1.35	4.84	4.34	.82	1.80	.91	1.46	.91
HF362PV, PG	60	16.26	9.15	17.46	11.53	13.36	12.62	1.19	6.00	2.25	1.25	2.50	.87	1.69	.87
HF363PV, PG	100	21.95	9.64	23.15	12.01	19.38	19.38	1.19	7.00	3.50	2.50	2.88	.98	2.45	.85
HF364PV, PG	200	29.90	14.62	31.07	16.98	18.75	22.43	5.10	11.00	8.20	1.93	4.88	.87	2.31	.81
HNF361PV, PG	30	11.11	6.64	12.31	9.01	6.52	7.20	1.35	3.00	4.34	.95	1.80	.91	1.46 ^②	.91
HNF362PV, PG	60	16.26	9.15	17.46	11.53	13.36	12.62	1.19	6.00	2.25	1.25	2.50	.87	1.69	.87
HNF363PV, PG	100	21.95	9.64	23.15	12.01	19.38	19.38	1.19	7.00	3.50	2.50	2.88	.98	2.45	.85
HNF364PV, PG	200	29.90	14.62	31.07	16.98	18.75	22.43	5.10	11.00	8.20	1.93	4.88	.87	2.31	.81
HF361RPV, PG	30	14.26	6.64	15.45	9.01	10.11	12.00	1.35	4.84	4.34	.82	1.80	.91	1.46	.91
HF362RPV, PG	60	16.26	9.15	17.46	11.53	13.36	12.62	1.19	6.00	2.25	1.25	2.50	.87	1.69	.87
HF363RPV, PG	100	21.95	9.64	23.15	12.01	19.38	19.38	1.19	7.00	3.50	2.50	2.88	.98	2.45	.85
HF364RPV, PG	200	29.90	14.62	31.07	16.98	18.75	22.43	5.10	11.00	8.20	1.93	4.88	.87	2.31	.81
HNF361RPV, PG	30	11.11	6.64	12.31	9.01	6.52	7.20	1.35	3.00	4.34	.95	1.80	.91	1.46 ^②	.91
HNF362RPV, PG	60	16.26	9.15	17.46	11.53	13.36	12.62	1.19	6.00	2.25	1.25	2.50	.87	1.69	.87
HNF363RPV, PG	100	21.95	9.64	23.15	12.01	19.38	19.38	1.19	7.00	3.50	2.50	2.88	.98	2.45	.85
HNF364RPV, PG	200	29.90	14.62	31.07	16.98	18.75	22.43	5.10	11.00	8.20	1.93	4.88	.87	2.31	.81

① Additional knockouts supplied near the top in back and side surfaces of indoor enclosures are not shown.

② Knockout supplied on left side only.

Notes:

1. Indoor enclosures are constructed of .054 inch thick cold rolled steel
2. Outdoor enclosures are constructed from .054 inch thick galvanized steel
3. Finish is ANSI #61 gray

Knockout sizes (inches), wiring bending/side gutter space and lug wire range

Ampere Rating	Knockout Code	Conduit Size (inches)	Wire Bending & Side Gutter Space (inches)			Wire Range Line And Load (Cu/Al)
			Top	Bottom	Left Side Gutter Width	
30 - Fusible	AA (concentric)	.75, 1.00	3.02	2.61	1.5	#14 - 6 AWG, 60/75° C
30 - NF	BB (tangential)	.50, .75, 1.00	3.02	4.11		
60 - Fusible	AA (tangential)	.50, .75, 1.00, 1.25	3.54	3.57	2.25	#14 - 2 AWG, 60/75° C
60 - NF			3.54	8.68		
100 - Fusible	AA (tangential)	.75, 1.00, 1.25, 1.50	6.07	6.10	2.75	#6 - 1/0 AWG, 75° C
100 - NF	BB (tangential)	1.00, 1.25, 1.50, 2.00	6.07	11.46		
200 - Fusible	AA (tangential)	1.25, 1.50, 2.00, 2.50	7.87	7.87	4.44	#6 - 250 Kcmil, 75° C
200 - NF			7.87	15.84		

Published by
Siemens 2018

Siemens Industry, Inc.
5400 Triangle Parkway
Norcross, GA 30092

1-800-241-4453
info.us@siemens.com

Order No. SSFL-PHVL-0118-CP
Printed in USA
All Rights Reserved
© 2018, Siemens Industry, Inc.
usa.siemens.com/switches

The technical data presented in this document is based on an actual case or on as-designed parameters, and therefore should not be relied upon for any specific application and does not constitute a performance guarantee for any projects. Actual results are dependent on variable conditions. Accordingly, Siemens does not make representations, warranties, or assurances as to the accuracy, currency or completeness of the content contained herein. If requested, we will provide specific technical data or specifications with respect to any customer's particular applications. Our company is constantly involved in engineering and development. For that reason, we reserve the right to modify, at any time, the technology and product specifications contained herein.